

Win-Test  
**NAME or FRIEND Files Instructions**


File name name.xdt

Make sure the file downloaded okay by viewing the file with Notepad. The first few lines of the file should look like this:

```
# TITLE Op Name - Section - State/Province
AA0AW Doug MN MN MWA
AC0LL Bruce MN MN MWA
AC0W Bill MN MN MWA
AC0X Lou MN MN MWA
AF9T John WI WI MWA
```

Next follow these instructions:

1. Save file in C:\Documents and Settings\All Users\Application Data\Win-Test\extras
2. On the Menu bar go to – **OPTION – DATA FILES – DEFAULT EXTRA DATA FILES...** and click on Default Extra Data files.
3. In the pop up window select **name.xdt** and then OK.
4. WINDOWS Menu select Extra Information, about ½ way down.
5. This will bring up a pop up window.
6. See sample screen shot

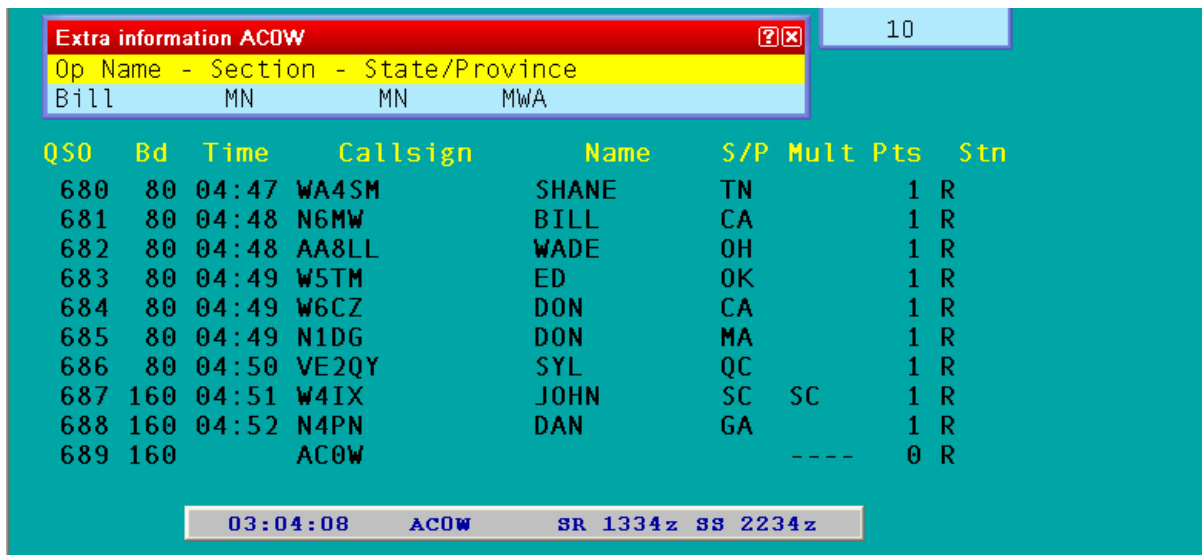

To send hi to the person in CW or RTTY it will take a different name.xdt file. With this file you will not get the ARRL Section or the State. Verify the file downloaded properly by opening with Notepad. The start of the file should look like this:

```

# TITLE Op Name
# VARIABLE $OPNAME
AA0AW HI Doug
AC0LL HI Bruce
AC0W HI Bill
AC0X HI Lou
AF9T HI John

```

Follow previous instruction to display the name on the screen.

In the message you wish to say HI NAME add into the message \$OPNAME.

The message and the screen shot looks like this:

The screenshot shows a software interface with a teal background. At the top, there is a blue window titled "Message associated with the key F2" containing a text input field with "\$OPNAME BILL MN" and a "Validate" button. Below this is a red window titled "Extra information AC0X" with a yellow highlight on "Op Name" and "HI Lou" below it. The main area displays a list of stations in a table format:

QSO	Bd	Time	Callsign	Name	S/P	Mult	Pts	Stn
680	80	04:47	WA4SM	SHANE	TN		1	R
681	80	04:48	N6MW	BILL	CA		1	R
682	80	04:48	AA8LL	WADE	OH		1	R
683	80	04:49	W5TM	ED	OK		1	R
684	80	04:49	W6CZ	DON	CA		1	R
685	80	04:49	N1DG	DON	MA		1	R
686	80	04:50	VE2QY	SYL	QC		1	R
687	160	04:51	W4IX	JOHN	SC	SC	1	R
688	160	04:52	N4PN	DAN	GA		1	R
689	160		AC0X				0	R

At the bottom, a status bar shows "03:28:12 AC0W SR 1334z SS 2234z".